




### NEG ARG FIBRE ACS13PH950X High Zirconia Alkali Resistant Glass Fibre

Product Name <b>ACS13PH950X</b>	Product Type <b>Chopped Strand</b>	Uses <b>Premix GRC</b>
------------------------------------	---------------------------------------	---------------------------



A=Alkali Resistant   CS=Chopped Strand   13=Chopped Length  
H950=Sizing   X=200 Filaments

ACS13PH950X is formed from 200no. 18-micron diameter filaments. It has the highest strand integrity and high fibre percentages can be added without adversely affecting the workability. ACS13PH950X is resistant to overmixing. The new H950 sizing has improved workability, allowing less water or more fibre to be used for the same fluidity.

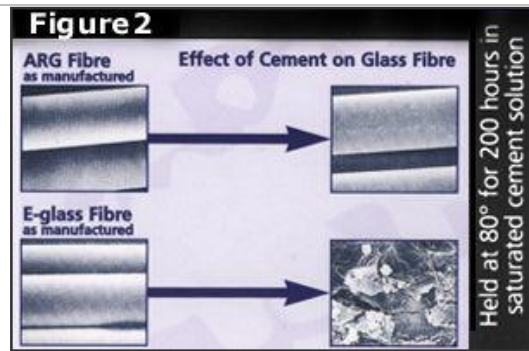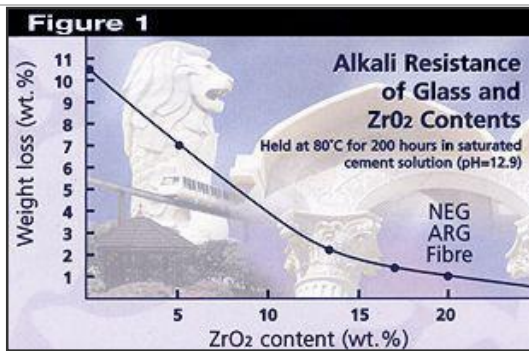

#### Properties

Type of Glass	Alkali Resistant
Filament Diameter $\mu$	18
Filaments per Strand	200
Zirconia Content	Minimum 17%
Moisture Content	< 0.5%

#### Advantages

High Zirconia Content  
Highest Integrity During Mixing  
Best Flow Characteristics  
Proven Japanese Quality

ACS13PH950X is supplied in Bags  
20 kgs each  
36 per pallet  
Net weight 720kgs   Gross weight 780kgs  
144 x 115 x 107cm



**SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL**

#### For further information contact:

Fibre Technologies International Limited  
Avonmouth Way  
Avonmouth  
Bristol BS11 9YA

☎: +44 (0)117 9825855  
Fax: +44 (0)117 9820060  
info@fibretch.org  
www.fibretch.org

**MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION**



Certificate No. AJA01/2902