

Roving AR2500H-350Y

Suitable for spray or premix GRC



High Zirconia 17%+ Alkali-Resistant Glass Fibre

Product Description

AR2500H-350Y is a roving glass fibre which can be used for either spray or premix GRC. It is a 100 filament-per-strand fibre, providing twice as many reinforcing strands as conventional fibres, ensuring effectiveness even at lower fibre contents. For spray it can be used at 3.5 – 4.5% to give equivalent flexural strengths to 5% conventional fibre.


Advantages

- High zirconia content
- Effective at lower fibre %
- Long term durability
- Suitable for automated spray systems
- Proven Japanese quality

Product Information


Type of Glass:	Alkali-Resistant
Roving Tex (g/1000m):	2500 nominal
Strand Tex:	39
Filaments per Strand:	100
Zirconia Content:	Minimum 17%
Moisture Content:	< 0.5%

Fig. 1 Alkali Resistance of Glass & ZrO₂ Contents

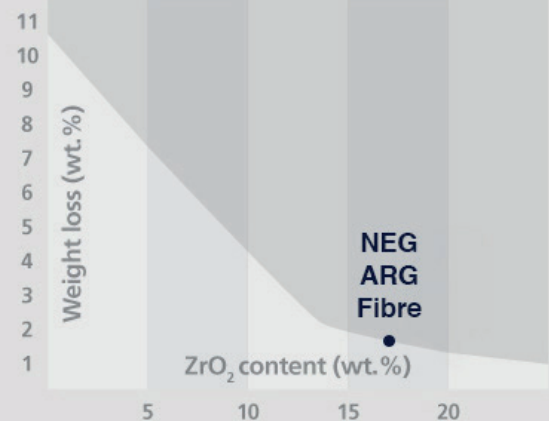

Held at 80°C for 200 hours in a saturated cement solution (pH = 12.9)

Fig. 2 Effect of Cement on Glass Fibre

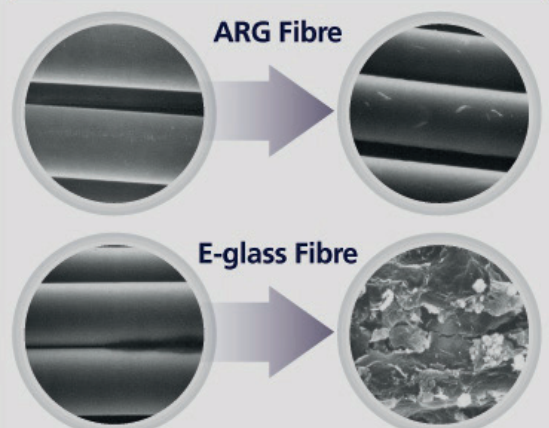

Held at 80°C for 200 hours in a saturated cement solution (pH = 12.9)

Continued on next page...

Properties

Thermal Expansion Coefficient:	9 x 10 ⁻⁶ /°C	(5 x 10 ⁻⁶ /°F)
Softening Point:	830 °C	(1526 °F)
Density:	2.8g/cm ³	(175pcf)
Tensile Strength:	1.5GN/m ²	(2.04 x 10 ⁵ psi)
Young's Modulus:	74GN/m ²	(1.08 x 10 ⁷ psi)
Strain to Failure:	2%	

Technical Support

Fibre Technologies International Ltd

Avonmouth Way
Avonmouth
Bristol BS11 9YA
United Kingdom

- Tel: +44 (0) 117 982 5855
- Fax: +44 (0) 117 982 0060
- info@fibrettech.org
- www.fibrettech.org



Supplied in rovings, 20kg each, 48 per pallet

Net Weight: 960kg

Gross Weight: 990kg

110 x 110 x 110cm

Supplied by Fibre Technologies International

*NEG ARG Fibres are manufactured in compliance with **ASTM C1666/C** and **EN 15422:2008** under the recommendations of PCI and GRCA*

