



NEG ARG FIBRE ACS19PH950X
High Zirconia Alkali Resistant Glass Fibre

Product Name ACS19PH950X	Product Type Chopped Strand	Uses Premix GRC
------------------------------------	---------------------------------------	---------------------------



A=Alkali Resistant CS=Chopped Strand 19=Chopped Length
H950=Sizing X=200 Filaments

ACS19PH950X is formed from 200no. 18-micron diameter filaments. It has the highest strand integrity and high fibre percentages can be added without adversely affecting the workability. ACS19PH950X is resistant to overmixing.

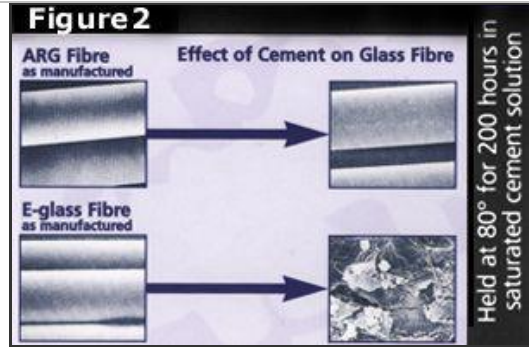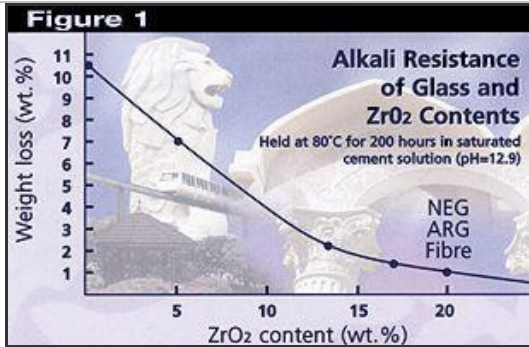

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Highest Integrity During Mixing Best Flow Characteristics Proven Japanese Quality
Filament Diameter μ	18	
Filaments per Strand	200	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

ACS19PH950X is supplied in Bags
20 kgs each
36 per pallet
Net weight 720kgs Gross weight 780kgs
115x 144 x 107cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
Avonmouth Way
Avonmouth
Bristol BS11 9YA

☎: +44 (0)117 9825855
Fax: +44 (0)117 9820060
info@fibretch.org
www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION

